

eNet SMART HOME connect

.....
QUICK START GUIDE


CONTENTS



Preparation	Page 3
Creating a project	Page 6
Creating a building structure	Page 7
Searching for devices	Page 9
Adding devices to a selected room and configuring them	Page 10
- Device configuration using the example of a wall transmitter	Page 11
- Device configuration using the example of a switch actuator	Page 13
Creating connections	Page 15
Programming the project in devices	Page 23
Finalizing the project	Page 24

Ensure that

- all eNet devices are already installed.
- the operating mode selector switch is set to "PC":

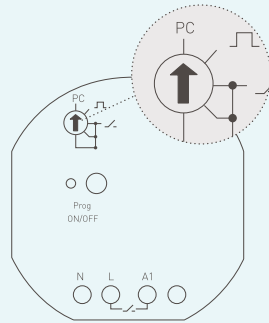



- the programming button is accessible, or alternatively the mains voltage can be switched off as desired.
- all batteries are inserted and devices with batteries are charged (e.g. solar sensor).
- the eNet server is connected to the mains voltage and to the router via a network cable.
- PC or tablet with web browser are also in the same network.
- eNet server and smartphone are in the same network.
- you have downloaded the eNet SMART HOME app to your mobile phone.



PREPARATION




Open the eNet SMART HOME app and connect to the eNet server.

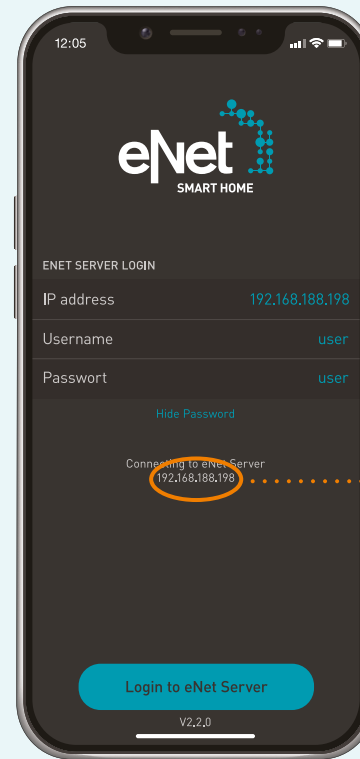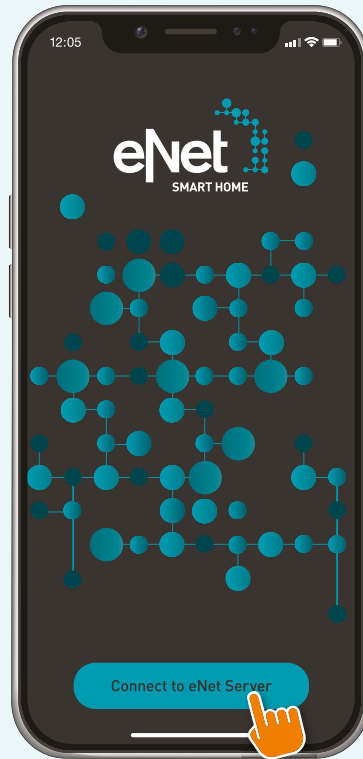

NOTE:
Please consent to our Privacy Policy for the use of the eNet SMART HOME connect interface in order to proceed.



Enter the displayed IP address in the web browser (PC or tablet).



PREPARATION



Log onto the PC or tablet with user-name "admin" and password "admin"

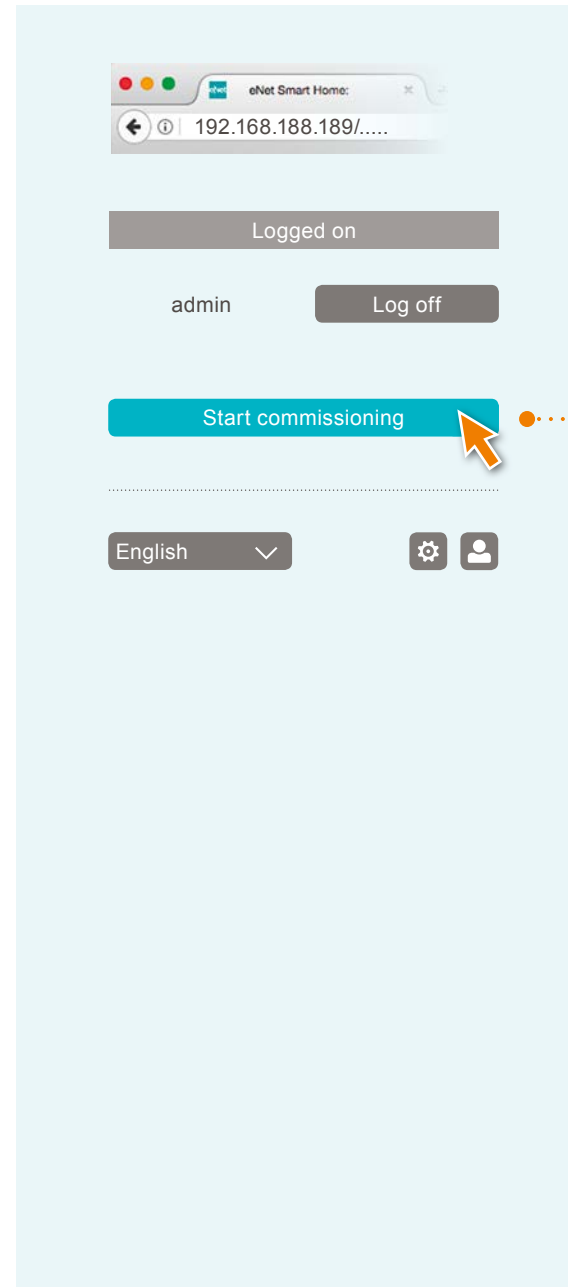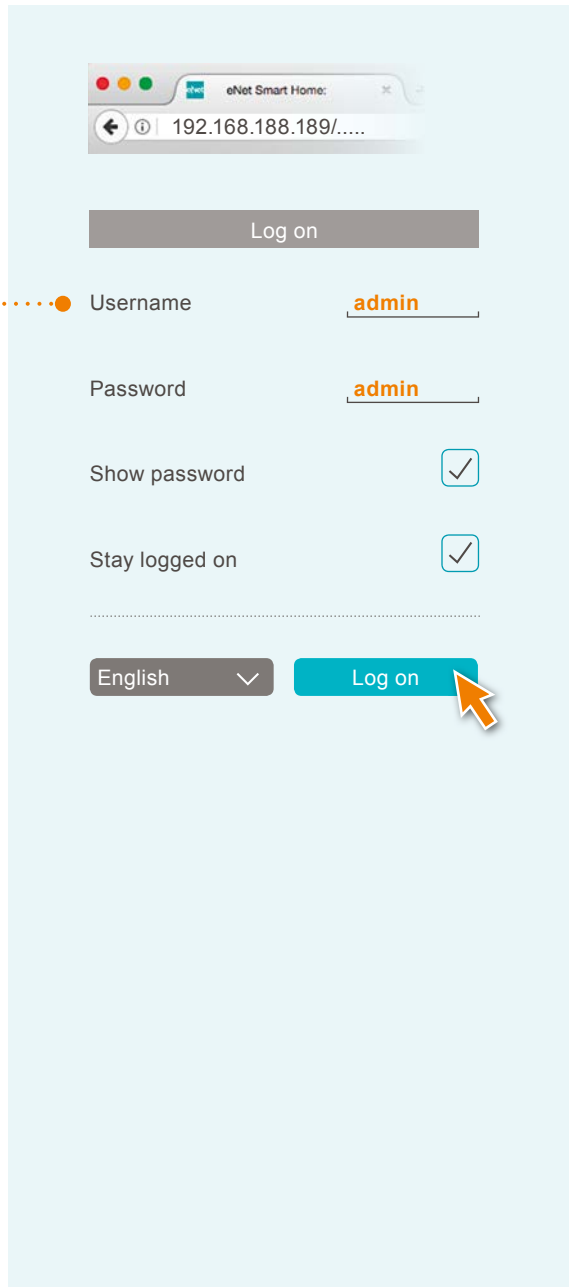

Start commissioning

CREATING A PROJECT



Please create a new project.

Create project

Project name Import project

Change password

Old password Show password

New password Retype password

Date and time

Time Date Transfer current time

Time zone (UTC+1) CET - Central European Standard Time Automatic time (Internet)

Installation location

This information is required for time control in connection with astro functions.

Location Germany Lüdenscheid Manual

Coordinates Create project

Specify the project name

Change the administrator password for security reasons

Specify the installation location*

Select "Automatic time"

To next step

* Location and time data are relevant for automatic functions. "Automatic time" requires an Internet connection

CREATING A BUILDING STRUCTURE



192.168.188.189/.....

eNet connect SMART HOME

Rooms Devices Connections Project Diagnostics

Create and edit rooms and areas. [Continue](#)

+ New area / new floor

||| **Top floor**

Bedroom Children's room Bathroom

+ New room

||| **Ground floor**

Living room Kitchen Hallway

+ New room

||| **Outdoors**

Garden Garage Balcony

+ New room

Rooms without area assignment

+ New room

2 Create floors in the same order as they are to appear later on in the app

4 Go to next step

3 Add rooms to floors*

* In the case of a flat, there is no need for you to create floors. It is sufficient to simply add new rooms.

CREATING A BUILDING STRUCTURE



The screenshot shows a web browser window with the address bar displaying "192.168.188.189/....". The page title is "eNet Smart Home". The navigation menu includes "Rooms", "Devices", "Connections", "Project", and "Diagnostics". A modal dialog box titled "Please select a room ..." is open, showing a list of rooms categorized by floor and area. The "Living room" button is highlighted with a mouse cursor.

Floor/Area	Room
Top floor	Bedroom
	Children's room
	Bathroom
Ground floor	Living room
	Kitchen
	Hallway
Outdoors	Garden
	Garage
	Balcony
Rooms without area assignment	

Select the room
the devices you are
adding in this step
are installed in

SEARCHING FOR DEVICES



The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home: connect'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Devices' tab is active, showing a 'Back' button, a 'Continue' button, and a 'Device search' section. The 'Device search' section has a 'Start search' button (highlighted with a red circle and arrow) and a dropdown menu for 'All devices'. Below this is a list of instructions:

- Start the device search
- **Switch the desired devices to programming mode. You can find information on this in the appropriate operating manuals.**
- Select a room and add the desired devices found to the selected room.
- Assign a new device designation and change the channel designation and the channel location, if necessary.
- At the end: End the device search again.

The right side of the interface shows the 'Living room' section with the text 'Add a device for the selected room.' Below this is an illustration of a device being pressed with a screwdriver, with a '4 s' timer and a red circle '2' indicating the next step.

Start the device search




NOTE:

Partner systems like tado° professional will be added after commissioning via the eNet SMART HOME app. For integration of the tado° partner systems is at least the server software v2.1 required.

Get more information in the Quick Start Guide for the eNet SMART HOME app. You will find this in our download area.

Set the device installed in the selected room to programming mode

ADDING AND CONFIGURING DEVICES



The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home:'. The navigation bar includes 'Rooms', 'Devices' (selected), 'Connections', 'Project', and 'Diagnostics'. Below the navigation bar, there are 'Back' and 'Continue' buttons. The main content area is divided into 'Device search' and 'Catalogue' tabs. The 'Living room' is selected, and the page displays a list of devices with their status indicators (colored dots) and a '+' button to add them. The devices listed are:

- Switch/push button actuator 1-gang mini (Mini (flush-mounted)) - Status: Green dot
- Centre plate (Cover) - Status: Green dot
- Centre plate for bli... control (Cover) - Status: Green dot
- Wall transmitter, 3-... with inscription sp... (Wall transmitter) - Status: Green dot

Stop the search as soon as all devices have been found


Add devices to the selected room

Colour legend

- No device access
- Device not accessible or in an invalid Name
- Device not programmed or changes exist
- Device programmed, no changes exist

ADDING AND CONFIGURING DEVICES

└ DEVICE CONFIGURATION USING THE EXAMPLE OF A WALL TRANSMITTER



The screenshot shows a web browser window with the URL 192.168.188.189/.... The interface has a navigation bar with 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Devices' tab is active. Below the navigation bar, there are two tabs: 'Device and channels' (selected) and 'Advanced device settings'. The 'Device and channels' tab displays a configuration form for a 'Wall transmitter, 3-... with inscription sp... Wall transmitter'. The form includes a 'DEVICE LOCATION' dropdown set to 'Living room' and a 'DEVICE DESIGNATION' dropdown set to 'Door area'. Below the form is a table with columns: CHANNEL NAME, CHANNEL LOCATION, FUNCTION, and OPERATING MODE. The table contains four rows of channels: 'Ceiling light', 'Roller shutters', 'Scene 1', and 'Scene 2'. At the bottom of the form are buttons for 'Shift device', 'Program device', 'Save', and 'Close'. An orange arrow points to the 'Save' button.

CHANNEL NAME	CHANNEL LOCATION	FUNCTION	OPERATING MODE
1 Ceiling light	Living room	[Icons]	[Settings]
3 Roller shutters	Living room	[Icons]	[Settings]
5 Scene 1	Living room	[Icons]	App use [Settings]
6 Scene 2	Living room	[Icons]	App use [Settings]


Name the transmitter channels according to their function (this label appears in the app)

Specify the purpose or function of the transmitter channel

Name the installation position of the transmitter

Save entries

ADDING AND CONFIGURING DEVICES



The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home:'. The navigation bar includes 'Rooms', 'Devices' (selected), 'Connections', 'Project', and 'Diagnostics'. Below the navigation bar, there are 'Back' and 'Continue' buttons. The main content area is divided into two columns. The left column has a 'Device search' section with a 'Stop search' button and a dropdown menu set to 'All devices'. Below this is a list of three device options, each with an icon, a name, a description, and a '+' button. The right column shows the current room selection: 'Ground floor » Living room'. Below this, there is a card for a 'Wall transmitter, 3-... with inscription sp...' with a settings gear icon and two location options: 'Door area' and 'Living room'. An orange arrow points to the '+' button of the third device in the list, and a text annotation 'Add other devices needed in the room' is connected to it by a dotted line.

Back Add devices and edit their settings. Continue

Device search Catalogue

Stop search All devices

- Switch/push-button actuator 1-gang mini
Mini (flush-mounted)
- Centre plate
Cover
- Centre plate for bli... control
Cover

Ground floor » Living room


Wall transmitter, 3-... with inscription sp...
Wall transmitter

Door area Living room

Add other devices needed in the room

ADDING AND CONFIGURING DEVICES

└ DEVICE CONFIGURATION USING THE EXAMPLE OF A SWITCH ACTUATOR



The screenshot shows the 'eNet Smart Home' web interface. The browser address bar shows '192.168.188.189/...'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Devices' tab is active, displaying a configuration window for a device named 'Centre plate for blind control Cover'. The window is split into 'Device and channels' and 'Advanced device settings'. The 'Advanced device settings' section includes 'DEVICE LOCATION' set to 'Living room' and 'DEVICE DESIGNATION' set to 'Window'. Below this is a table of channels with columns for 'CHANNEL NAME', 'CHANNEL LOCATION', 'FUNCTION', and 'OPERATING MODE'. The table contains one entry: '1 Window' at 'Living room' with a 'Blind' function and 'Roller shutters' operating mode. At the bottom of the window are buttons for 'Shift device', 'Program device', 'Save', and 'Close'. A mouse cursor is pointing at the 'Save' button.

CHANNEL NAME	CHANNEL LOCATION	FUNCTION	OPERATING MODE
1 Window	Living room	Blind	Roller shutters ✓

Name the actuator channels according to their function (this label appears in the app)

Select a room in which the channel is active

Name the Installation position of the actuator

Specify the function and operating mode of the actuator channel

Save entries

ADDING AND CONFIGURING DEVICES



Configure all devices in this way, room for room

The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home: connect'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Devices' tab is active. Below the navigation, there are 'Back' and 'Continue' buttons. The main content area is titled 'Ground floor » Living room' and displays a list of devices with their respective room assignments and settings icons.

Back Add devices and edit their settings. Continue

Device search Catalogue

Start search All devices

• Start the device search

- Switch the desired devices to programming mode. You can find information on this in the appropriate operating manuals.
- Select a room and add the desired devices found to the selected room.
- Assign a new device designation and change the channel designation and the channel location, if necessary.
- At the end: End the device search again.


Wall transmitter, 3-... with inscription sp...
Wall transmitter
Door area Living room

Centre plate for bli... control
Cover
Window Living room

Centre plate
Cover
Balcony door Living room

To next step

CREATING CONNECTIONS



The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home: connect'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Connections' tab is active. Below the navigation, there are 'Back' and 'Continue' buttons. The main content area is titled 'Create and edit connections between devices.' and shows a breadcrumb 'Ground floor » Living room' with a '+ New connection' button. A list of devices is shown on the left, each with a room assignment: 'Living room (Ground floor) [3]'. The devices are: 'Wall transmitter, 3-... with inscription sp...' (Door area, Living room), 'Centre plate for bli... control Cover' (Window, Living room), and 'Centre plate Cover' (Balcony door, Living room). The right side of the screen shows a 'Living room' overview with the text 'Add a new connection.' An orange dotted line points from the text 'Select the room overview' to the 'Living room' header.

Select the room overview

CREATING CONNECTIONS



Select a room in which the connections are to be created*

* The selection of the room is only intended to provide a better overview within the project.

CREATING CONNECTIONS



The screenshot shows a web browser window with the URL 192.168.188.189/.... The page title is 'eNet Smart Home: connect'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Connections' tab is active. Below the navigation, there are 'Back' and 'Continue' buttons. The main content area is titled 'Create and edit connections between devices.' and shows a breadcrumb path 'Ground floor » Living room'. A '+ New connection' button is highlighted with an orange arrow. To the right of this button, an orange dotted line points to the text 'Create a new connection*'. The left sidebar shows a list of devices in the 'Living room (Ground floor) [3]'. The devices are: 'Wall transmitter, 3-... with inscription sp... Wall transmitter' (located in Door area), 'Centre plate for bli... control Cover' (located in Window), and 'Centre plate Cover' (located in Balcony door). The main content area displays 'Living room' and 'Add a new connection.'

* Connections are created, e.g. for the use of hand-held and wall-mounted transmitters

CREATING CONNECTIONS




Name the connections according to their function

Select a wall transmitter whose channel is to be used in the connection for operation

The screenshot shows the 'Connections' page in the eNet Smart Home web interface. The browser address bar shows '192.168.188.189/...'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The main heading is 'Create and edit connections between devices.' with 'Back' and 'Continue' buttons. The current location is 'Ground floor » Living room' with a dropdown menu set to 'All devices'. A 'Roller shutters' connection is selected, with a '+ New connection' button. Below this are 'Delete', 'Shift', and 'Program' buttons. A text box explains: 'You can also program connections in groups at the end of commissioning. To do this, you can simply exit this page or create an additional connection. All the data is saved automatically.' At the bottom, there are two large dark grey boxes labeled 'Sensors' and 'Actuators', each containing the text 'Add sensors.' and 'Add actuators.' respectively. On the left, a list of devices is shown for the 'Living room (Ground floor) [3]': 'Wall transmitter, 3-... with inscription sp...' (Door area, Living room), 'Centre plate for bli... control Cover' (Window, Living room), and 'Centre plate Cover' (Balcony door, Living room). Each device has a yellow status indicator and a blue '+' button. An orange arrow points to the '+' button of the first wall transmitter.

CREATING CONNECTIONS



Select channels

Wall transmitter, 3-...
with inscription sp...
Wall transmitter

Door area Living room

	CHANNEL NAME	CHANNEL LOCATION	FUNCTION	
<input type="checkbox"/>	1 Ceiling light	Living room	Rocker	
<input checked="" type="checkbox"/>	3 Roller shutters	Living room	Rocker	

Apply Cancel

Select the required transmitter channel

Apply the connections


CREATING CONNECTIONS



Add the actuator whose channel is to be active in the connection

The screenshot shows the eNet Smart Home web interface. The browser address bar displays '192.168.188.189/...'. The navigation menu includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Connections' page is active, showing a breadcrumb path: 'Ground floor » Living room » Roller shutters'. A '+ New connection' button is visible. On the left, a list of devices is shown for the 'Living room (Ground floor)'. The first device is 'Wall transmitter, 3-... with inscription sp... Wall transmitter', located in the 'Door area' of the 'Living room'. An orange arrow points to the '+' button next to this device. Below it are 'Centre plate for bli... control Cover' (Window) and 'Centre plate Cover' (Balcony door). On the right, there are 'Delete', 'Shift', and 'Program' buttons. A text block explains: 'You can also program connections in groups at the end of commissioning. To do this, you can simply exit this page or create an additional connection. All the data is saved automatically.' At the bottom, a diagram shows a connection between a 'Sensors' panel (containing the 'Wall transmitter' device) and an 'Actuators' panel (containing the 'Roller shutters' device).

CREATING CONNECTIONS



Select channels

Centre plate for blinds control
Cover
Window Living room

CHANNEL NAME	CHANNEL LOCATION	FUNCTION
<input checked="" type="checkbox"/> 1 Window	Living room	Roller shutters

Apply Cancel

Select the actuator channel

Apply the connections

CREATING CONNECTIONS



Proceed in this manner until all desired connections are created, then continue with the next step

The screenshot shows the 'eNet Smart Home' web interface. The top navigation bar includes 'Rooms', 'Devices', 'Connections', 'Project', and 'Diagnostics'. The 'Connections' tab is active. Below the navigation bar, there are 'Back' and 'Continue' buttons. The main content area is titled 'Create and edit connections between devices.' and shows the path 'Ground floor » Living room' with a 'Roller shutters' device selected. A '+ New connection' button is visible. Below this, there are 'Delete', 'Shift', and 'Program' buttons. A text block explains: 'You can also program connections in groups at the end of commissioning. To do this, you can simply exit this page or create an additional connection. All the data is saved automatically.' At the bottom, a diagram shows a connection between a 'Sensors' panel (containing a 'Wall transmitter, 3-... with inscription sp... Wall transmitter' in the 'Door area') and an 'Actuators' panel (containing a 'Centre plate for bli... control Cover' in the 'Window' area). Both panels are located in the 'Living room'.



Back Program all the changes, create the project report and backup the project.

Changes have been made that can be programmed into the system:
4 devices and 2 connections have not yet been programmed.

Project name Last change DD-MM-YYYY 10:05:00

Notes

Radio communication between the eNet devices is not encrypted.

Program project

Activate encryption

Create project report

Export project

Compare project

Delete project

Import project

To user administration

You can create additional users for the eNet system in the user administration. You can also reach this via the System menu or the log-in screen.

- 1 Program the devices, settings and connections
- 2 Activate the encryption and create project report and backup copy
- 3 Create project report
- 4 Export project
- 5 Create additional users

FINALIZING THE PROJECT



eNet SMART HOME connect Rooms Devices Connections **Project** Diagnostics

192.168.188.189/.....

Back Program all the changes, create the project report and backup the project.

Changes have been made that can be programmed into the system:
4 devices and 2 connections have not yet been programmed. Program project

Project name Last change DD-MM-YYYY 10:05:00

Notes

Radio communication between the eNet device is not encrypted.

Activate encryption

Create project report

Export project

Compare project

Delete project

You can create additional users for the eNet system in the user administration. You can also reach this via the System menu or the log-in screen. To user administration

Close the commissioning

Gira

Giersiepen GmbH & Co. KG
Dahlienstrasse
P.O. Box 12 20
42477 Radevormwald
Germany
Tel. +49 21 95 602 0
Fax +49 21 95 602 191
www.gira.com
info@gira.com

Technical advice Gira
Tel. +49 21 95 602 123
Fax +49 21 95 602 118
hotline@gira.com

JUNG

Albrecht Jung GmbH & Co. KG
Volmestraße 1
58569 Schalksmühle
Germany
Tel. +49 23 55 806 553
Fax +49 23 55 806 254
www.jung.de
international@jung.de

Technical advice Jung
Tel. +49 23 55 806 555
Fax +49 23 55 806 255
international@jung.de

Insta GmbH

Hohe Steinert 10
P.O. Box 1830
58468 Lüdenscheid
Germany
Tel. +49 23 51 936 0
www.insta.de
info@insta.de

www.enet-smarthome.com